

Haki dwurożne DIN 15402 odkuwka

Nr art.: DD1074




Haki dwurożne wg DIN 15402 - haki do zbloczy linowych.


Udźwig haka dla grupy natężenia pracy wg FEM 9.511

Nr haka	1Bm 3M	1Am 4M	2m 5M	3m 6M	4m 7M	5m 8M
	[t]					
2	10.000	5.000	4.000	3.200	2.500	2.000
4	10.000	8.000	6.300	5.000	4.000	3.200
6	16.000	12.500	10.000	8.000	6.300	5.000
8	16.000	12.500	10.000	8.000	6.300	6.300

Rys. 1 hak 1,6-5

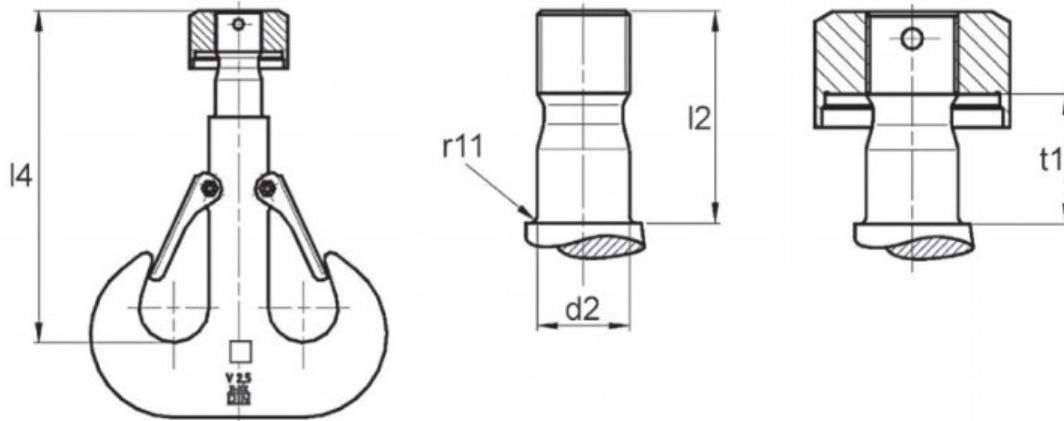

Rys. 2 hak 6-12

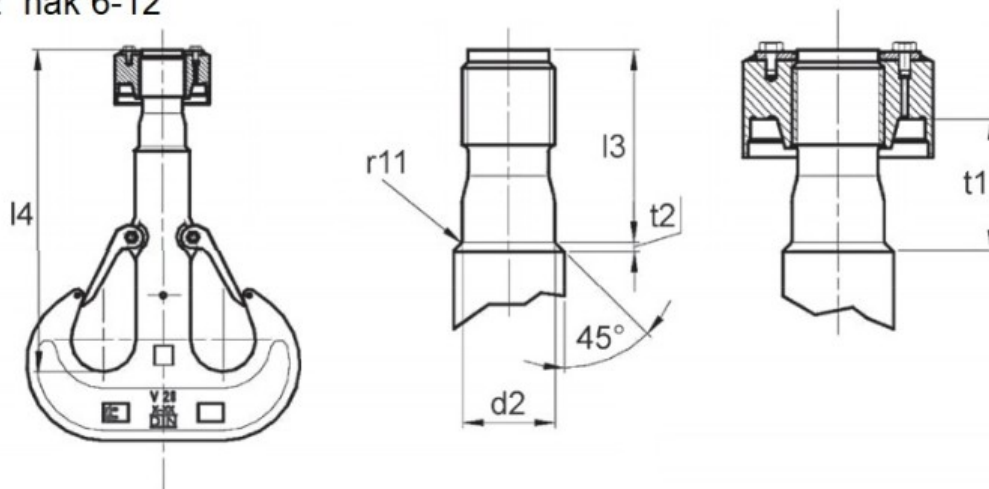

Pełna tabela wymiarów

Klasa	Nr haka	Rys.	a1	a2	a3	a4	b1	d1	e	f1	h	l1	l2	Waga
[mm]														[kg]
P	2,5	1	50	40	65	32	40	40	112	208	50	250	-	7
P	2,5	1	50	40	65	32	40	40	112	208	50	-	350	8
P	4	1	56	45	73	36	48	48	124	238	60	280	-	10
P	4	1	56	45	73	36	48	48	124	238	60	-	340	11
P	6	2	71	56	92	45	60	60	160	301	75	375	-	19
P	6	2	71	56	92	45	60	60	160	301	75	-	515	22
P	8	2	80	63	103	50	67	67	182	337	85	415	-	27

P	8	2	80	63	103	50	67	67	182	337	85	-	615	31
---	---	---	----	----	-----	----	----	----	-----	-----	----	---	-----	----