

Haki dwurożne DIN 15411 ze sworzniem typu C


Nr art.: DD1250



Haki dwurone wg DIN 15411 ze sworzniem typu C - haki do zbloczy linowych.

Udźwig haka dla grupy natężenia pracy wg FEM 9.511

Nr haka	1Bm 3M	1Am 4M	2m 5M	3m 6M	4m 7M	5m 8M
	[t]					
20	50.000	40.000	32.000	25.000	20.000	16.000
25	63.000	50.000	40.000	32.000	25.000	20.000
32	80.000	63.000	50.000	40.000	32.000	25.000
40	100.000	80.000	63.000	50.000	40.000	32.000
50	125.000	100.000	80.000	63.000	50.000	40.000
63	160.000	125.000	100.000	80.000	63.000	50.000
80	200.000	160.000	125.000	100.000	80.000	63.000

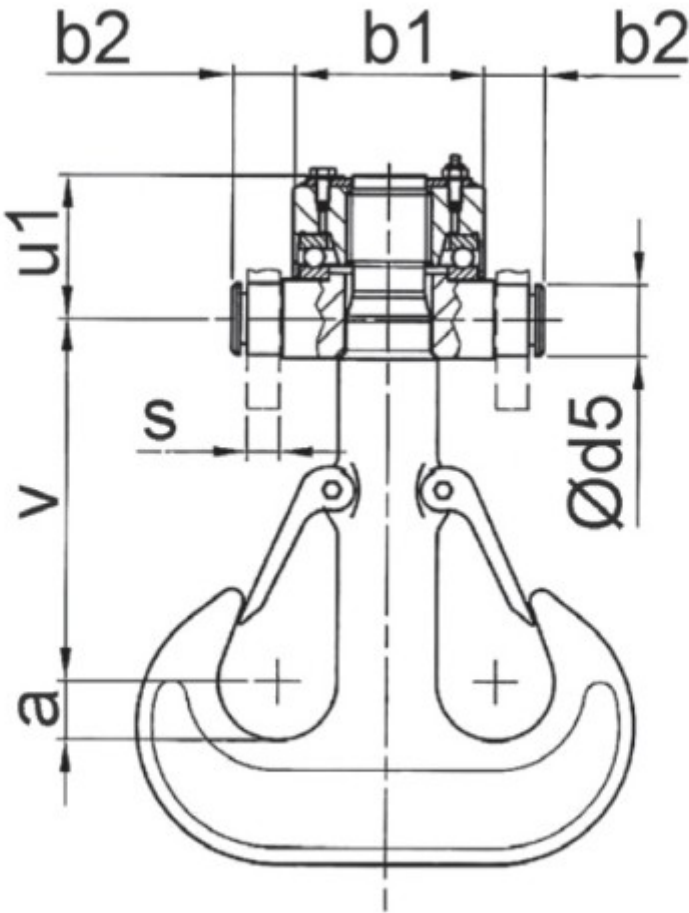

Pełna tabela wymiarów									
Klasa	Nr haka	a	b1	b2	s	d5	u1	v	Waga
		[mm]							[kg]
P	20	62,5	200	47,5	30	80	150	415	166
P	25	70	220	49	30	90	166	460	174
P	32	80	260	59	40	100	188	500	259

P	40	90	285	65	45	110	208	565	370	
	P	50	100	335	65	45	125	225	620	568
	P	63	112	380	71	50	140	260	700	830
	P	80	125	420	72,5	50	160	287	800	1148