

Haki dwurożne DIN 15402 z nakrętką

Nr art.: DD1249




Haki dwurone DIN 15402 - haki do zbloczy linowych, z nakrętką.


Udźwig haka dla grupy natężenia pracy wg FEM 9.511

Nr haka	1Bm 3M	1Am 4M	2m 5M	3m 6M	4m 7M	5m 8M
	[t]					
2,5	5.000	4.000	3.200	2.500	2.000	
4	10.000	8.000	6.300	5.000	4.000	3.200
6	16.000	12.500	10.000	8.000	6.300	5.000
8	20.000	16.000	12.500	10.000	8.000	6.300
10	25.000	20.000	16.000	12.500	10.000	8.000
12	32.000	25.000	20.000	16.000	12.500	10.000

Rys. 1 hak 1,6-5

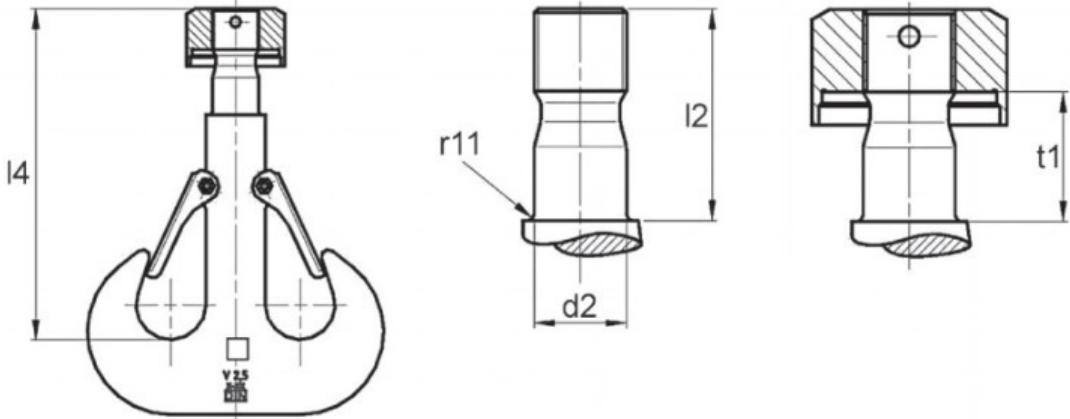

Rys. 2 hak 6-12

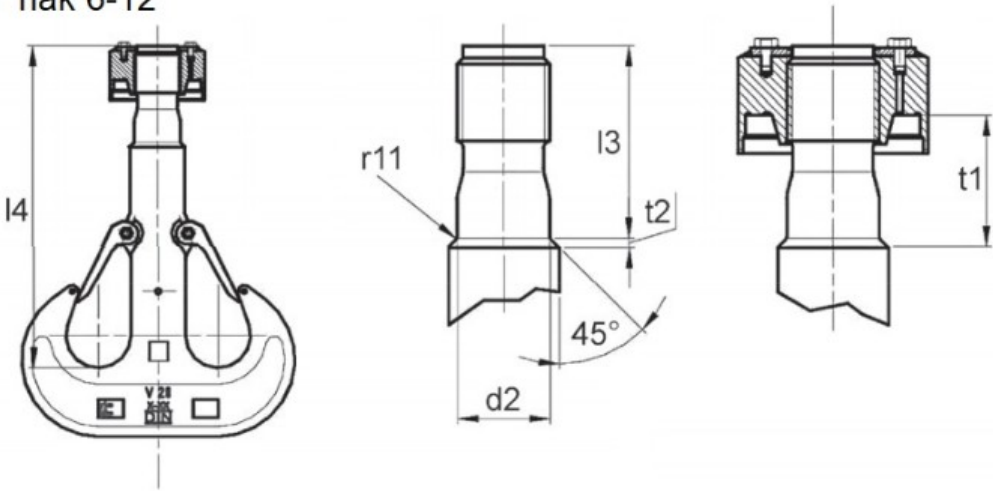

Pełna tabela wymiarów

Klasa	Nr haka	Rys.	d2	l2	l3	l4	t1	t2	r11	Waga
			[mm]							
P	2,5	1	36	83	-	244	50	-	3	9
P	4	1	42	93	-	274	56	-	3	14
P	6	2	50	-	112	365	79	4	3	26
P	8	2	56	-	112	406	85	4,5	3	41
P	10	2	64	-	135	435	95,5	5,5	3	60

P	12	2	72	-	157	492	110,5	6,5	3	89
---	----	---	----	---	-----	-----	-------	-----	---	----