

Haki dwurożne DIN 15411 ze sworzniem typu B

Nr art.: DD1245




Haki jednorożne wg DIN 15411 ze sworzniem typu B - haki do zbloczy linowych.


Udźwig haka dla grupy natężenia pracy wg FEM 9.511						
Nr haka	1Bm 3M	1Am 4M	2m 5M	3m 6M	4m 7M	5m 8M
[t]						
2,5	5.000	5.000	4.000	3.200	2.500	2.000
4	10.000	8.000	6.300	5.000	4.000	3.200
6	16.000	12.500	10.000	8.000	6.300	5.000
8	20.000	16.000	12.500	10.000	8.000	6.300
10	25.000	20.000	16.000	12.500	10.000	8.000
12	32.000	25.000	20.000	16.000	12.500	10.000

Charakterystyka:
2,5 ...
4 ...
6 ...
8 ...
10 ...
12 ...
Wymiary:
Waga:
Wytok:
Węgiel:

Rys. 1 hak 1,6-5

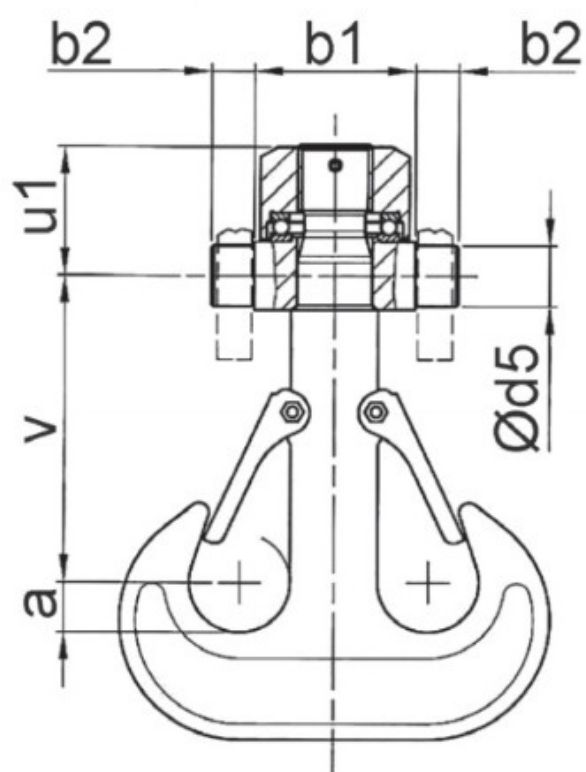

Rys. 2 hak 6-16

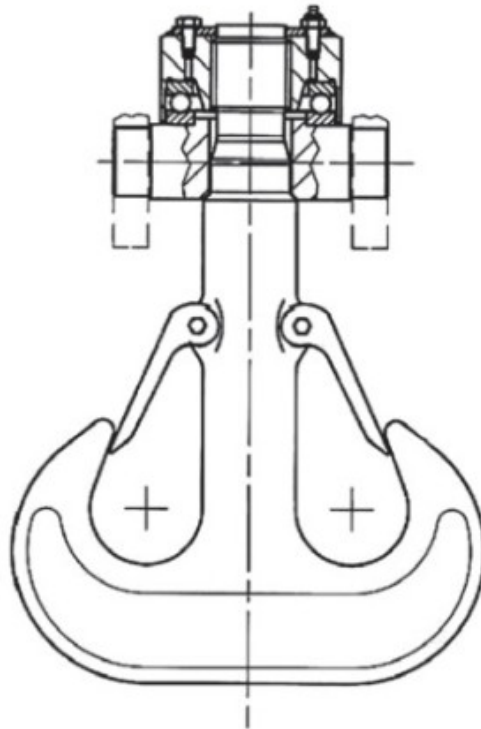

Pełna tabela wymiarów									
Klasa	Nr haka	Rys.	a	b1	b2	d5	u1	v	Waga
			[mm]						[kg]
P	2,5	1	25	80	20	30	63,5	155	9,2
P	4	1	28	90	22,5	35	71	175	14,3
P	6	2	35,5	125	27,5	45	90	240	26,3
P	8	2	40	140	30	50	98	265	41
P	10	2	45	160	30	55	110	280	60
P	12	2	50	180	35	60	127	315	89